

ACTUATION · DRIVE ADAPTORS

ADASR Drive Adaptor — Key Way to Star

Star drive to key way drive adaptor for interfacing quarter-turn actuators to valve stems. Carbon steel body, 17 mm to 46 mm across flats.

CARBON STEEL


17 – 46 MM

CE · ISO 9001 · TÜV

SPECIFICATION	
Size range	17 mm to 46 mm
Body	Carbon steel
Function	Star drive to key way
Factory accreditation	CE, ISO 9001, TÜV
Application	Interfacing actuators to valves



DIMENSIONS

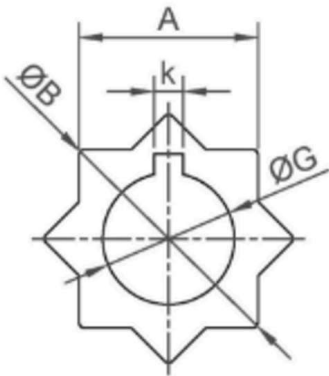

A across flats, ØB over star points, ØG bore and k key way width.

MODEL CODES & DIMENSIONS

Code	A (mm)	Ø G (mm)	k (mm)	B (mm)	Length (mm)
ADASR17-12.8	17	12.8	3	22.2	19
ADASR19-12.8	19	12.8	3	25.2	21
ADASR22-15.9	22	15.9	5	28.2	24
ADASR22-19.05	22	19.05	5	28.2	24
ADASR27-19.05	27	19.05	5	36.2	29
ADASR27-22.2	27	22.2	5	36.2	29
ADASR36-28.7	36	28.7	8	48.2	38
ADASR36-31.8	36	31.8	8	48.2	38
ADASR46-31.8	46	31.8	8	60.2	48
ADASR46-33.3	46	33.3	10	60.2	48
ADASR46-38.1	46	38.1	10	60.2	48
ADASR46-41.4	46	41.4	10	60.2	48
ADASR46-41.4-12	46	41.4	12	60.2	48

All dimensions in millimetres. Non-standard bore and key way combinations available on request.

Designs, materials and specifications shown are subject to change without notice due to our continuing program of product development. Confirm critical dimensions with Global Water Group prior to fabrication.