
PE WELDING EQUIPMENT · PIPE PREPARATION

Ritmo RTC Rotary Pipe Scrapers

Professional rotary scrapers designed and patented by Ritmo. They remove the oxidation layer caused by weather and UV exposure — which would otherwise severely compromise the joint — before electrofusion welding.

Ø50 – Ø710 MM | PATENTED BY RITMO | CONSTANT CHIP | ALUMINIUM CASE

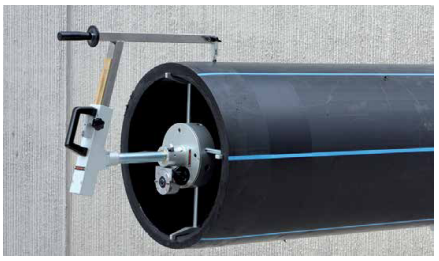

FEATURES

- Keeps the continuous chip thickness constant, even on misshapen pipe
- Scraping length adjustable to the depth of the electrofusion coupler
- RTC 710 extendable arm scrapes the exact coupler length — ideal for maintenance and repair
- RTC 710 main chuck has four extendable arms clamping directly to the pipe bore

STANDARD COMPOSITION

- Pipe scraper and spare blade
- Adapters kit (except RTC 710)
- Handwheel key (RTC 315)
- Aluminium transport case
- Screwdriver and small cutter

TECHNICAL FEATURES

Model	RTC 160	RTC 315	RTC 710
Working range — external	Ø50 – 160 mm	Ø75 – 315 mm	Ø355 – 710 mm
Working range — internal	Ø38 – 154 mm	Ø58 – 300 mm	Ø290 – 675 mm
Max scraping length	114 mm	137 mm	530 mm
Max dimensions	380 × 120 × 250 mm	510 × 310 × 410 mm	825 × 805 × 695 mm
Transport case dimensions	390 × 210 × 135 mm	230 × 500 × 270 mm	800 × 580 × 350 mm
Weight RTC only	2.5 kg	4.5 kg	16 kg
Weight standard composition	5.65 kg	7.5 kg	39 kg



RTC 160 and RTC 315



Manual Scraper
Same principle as the RTC, with a practical plastic handle and blade. Recommended up to Ø63 mm.

The information and photos in this publication are not binding and Ritmo S.p.A. is free to make any alterations without prior notice. Global Water Group — your trusted Ritmo distributor for PE welding solutions.

globalwatergroup.com
sales@globalwatergroup.com
+61 7 3517 5595

LOCATION
36 Hub Crescent, Heathwood QLD 4110 (Head Office)